




ANDHRA ELECTRONICS LIMITED

BAND PASS FILTER

PART NO: AE-BPF-41850

FREQ : 418.5 MHz

1. Center Frequency(Fc)	:	418.5 MHz
2. Insertion Loss	:	2.5dB(Max)
3. Pass Band@1dB	:	$F_c \pm 15.5$ MHz
4. Ripple In Pass Band	:	1dBMax
5. Rejection @ 50 dB	:	$F_c \pm 90$ MHz
6. Impedance	:	50 Ω
7. Spurious	:	70dBMin
8. VSWR(IN&OUT)	:	1.4:1
9. Operating Temperature	:	-40 to +85degC
10. Package	:	Pin Version
11. Dimensions	:	30x15x6mm

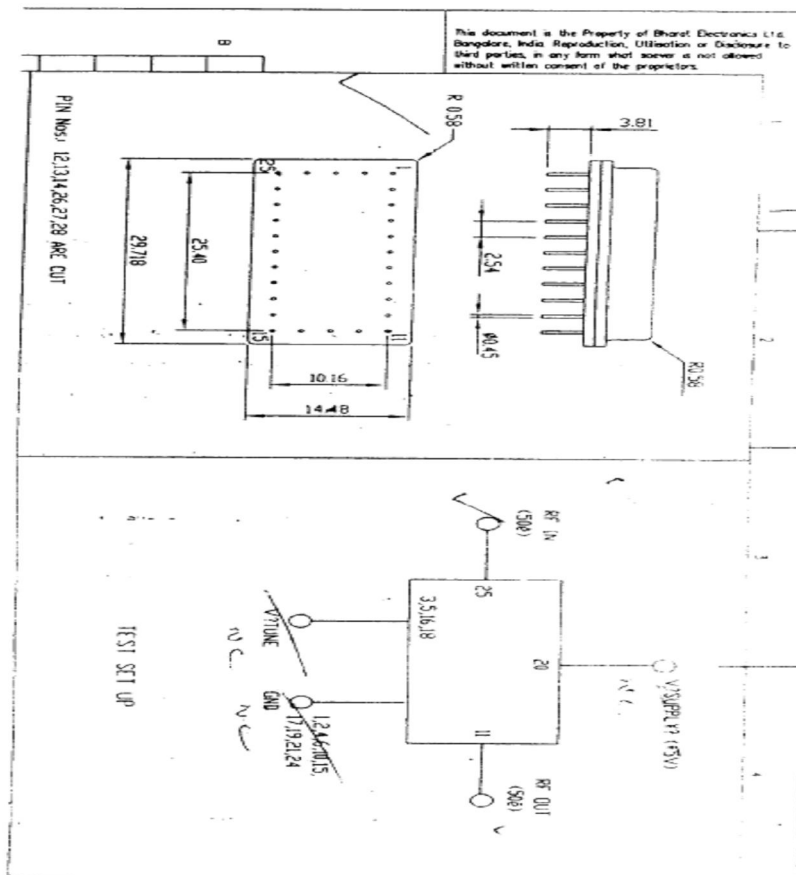

All Dimensions are in mm

Plot Nos.34 & 35, Industrial Development Area, KAKINADA - 533 005, INDIA.

Phone: 91-884-2342203 / 2341850 / 2379407 ♣ Fax: 91-884-2341145 / 2379408

E-mail: info@andhraelec.com ♣ www.andhraelec.com


ISO 9001

BUREAU VERITAS
Certification





ANDHRA ELECTRONICS LIMITED

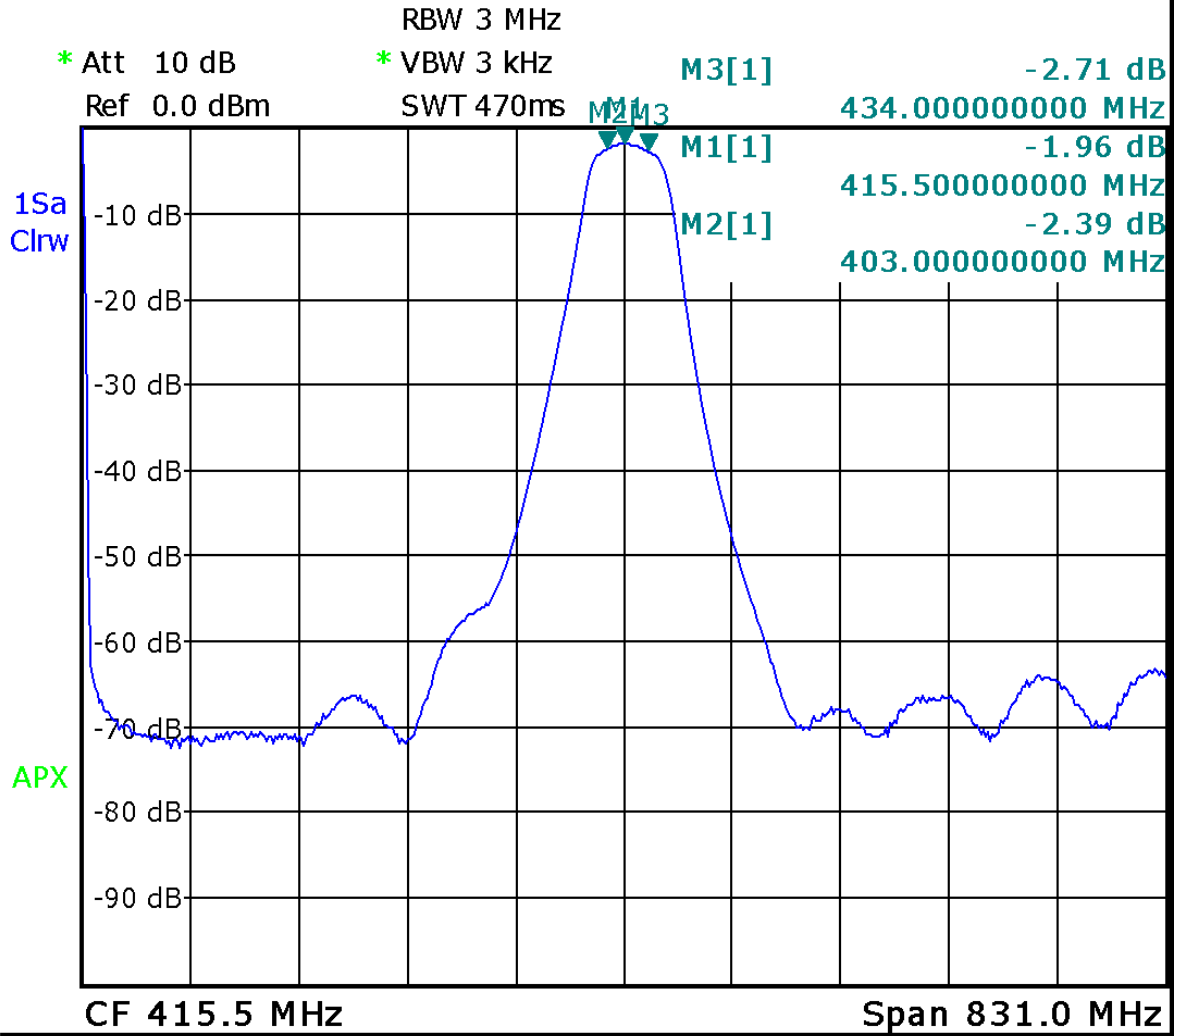

Date: 21.JUN.2010 15:56:06

Plot Nos.34 & 35, Industrial Development Area, KAKINADA - 533 005, INDIA.
Phone: 91-884-2342203 / 2341850 / 2379407 ♣ Fax: 91-884-2341145 / 2379408
E-mail: info@andhraelec.com ♣ www.andhraelec.com

