




ANDHRA ELECTRONICS LIMITED

BAND PASS FILTER

PART NO: AE-BPF-94125
FREQ: 9.4125 MHz

1. Center Frequency(Fc)	:	9.4125 MHz
2. Insertion Loss	:	2.5dB
3. Pass Band@1dB	:	$F_c \pm 530$ KHz
4. Ripple In Pass Band	:	0.25dBMax
5. Rejection @ 50 dB	:	$F_c \pm 3$ MHz
6. Rejection @ 60 dB	:	$F_c \pm 3.5$ MHz
7. Impedance	:	50 Ω
8. Spurious	:	70dBMin
9. VSWR(IN&OUT)	:	1.4:1
10. Operating Temperature	:	-40 to +85degC
11. Package	:	Pin Version
12. Dimensions	:	37x17x13.50mm

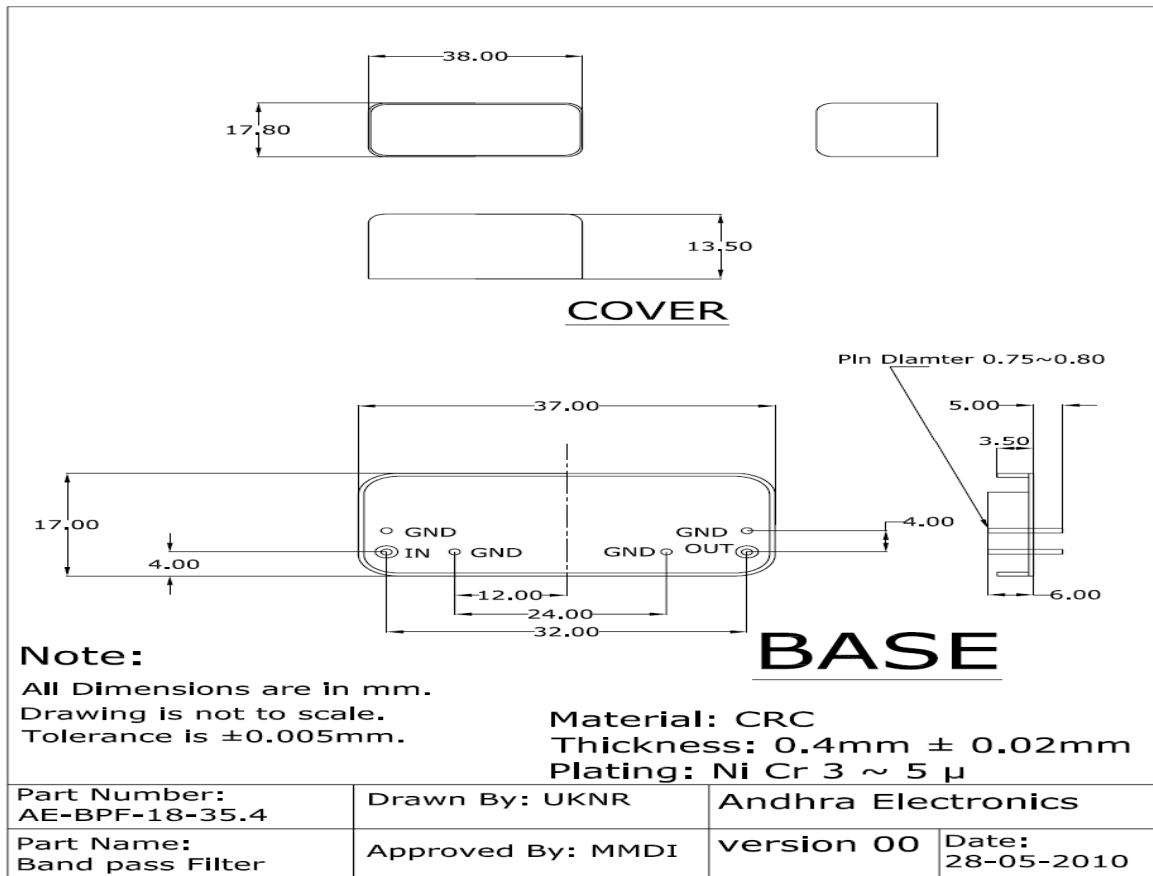

Plot Nos.34 & 35, Industrial Development Area, KAKINADA - 533 005, INDIA.
Phone: 91-884-2342203 / 2341850 / 2379407 ♣ Fax: 91-884-2341145 / 2379408
E-mail: info@andhraelec.com ♣ www.andhraelec.com


ISO 9001

BUREAU VERITAS
Certification





ANDHRA ELECTRONICS LIMITED

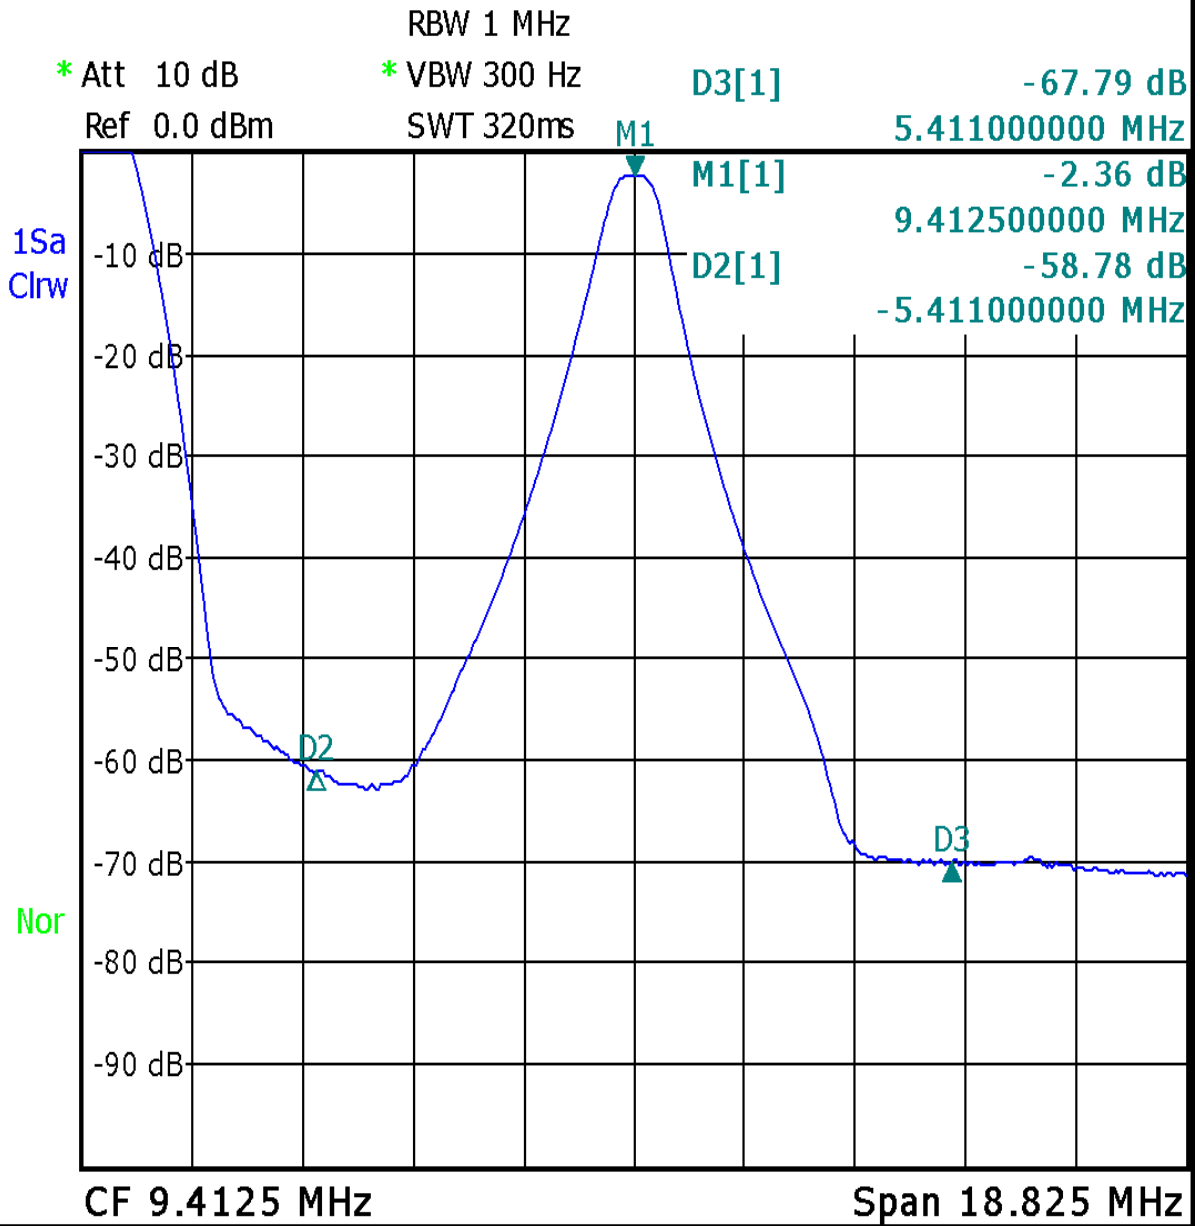

Date: 14.AUG.2010 11:06:14

Plot Nos.34 & 35, Industrial Development Area, KAKINADA - 533 005, INDIA.
Phone: 91-884-2342203 / 2341850 / 2379407 ♣ Fax: 91-884-2341145 / 2379408
E-mail: info@andhraelec.com ♣ www.andhraelec.com

ISO 9001

BUREAU VERITAS
Certification

