




# ANDHRA ELECTRONICS LIMITED

## BAND PASS FILTER

PART NO: AE-LC-700/3  
FREQ: 70 MHz

1. Center Frequency(Fc)	:	70 MHz
2. Insertion Loss	:	2dB(Max)
3. Pass Band@1dB	:	Fc±2.5 MHz
4. Ripple In Pass Band	:	0.5dBMax
5. Rejection @ 50 dB	:	Fc±30 MHz
@ 60 dB	:	Fc±45 MHz
6. Impedance	:	50Ω
7. Spurious	:	70dBMin
8. VSWR(IN&OUT)	:	1.4:1
9. Operating Temperature	:	-40 to +85degC
10. Package	:	Pin Version
11. Dimensions	:	37x17x13.50mm

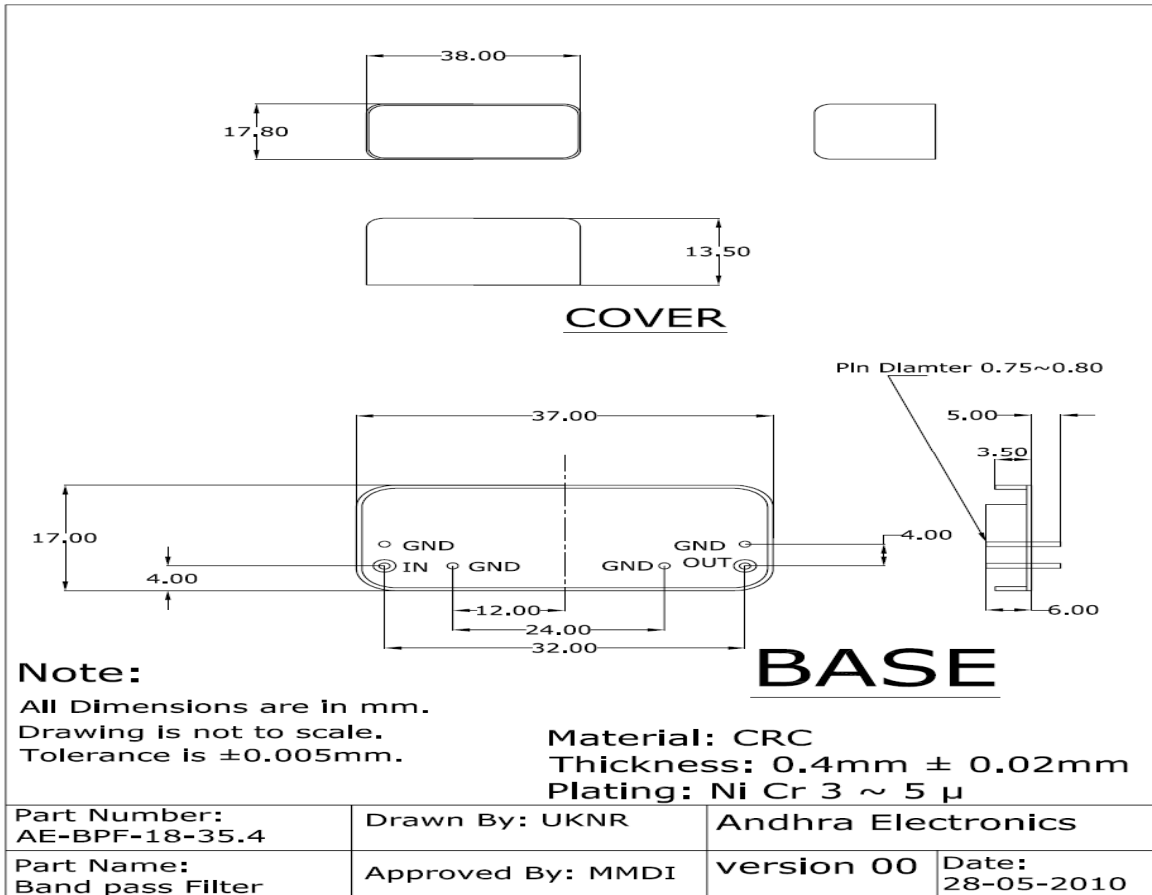


Plot Nos.34 & 35, Industrial Development Area, KAKINADA - 533 005, INDIA.  
Phone: 91-884-2342203 / 2341850 / 2379407 ♣ Fax: 91-884-2341145 / 2379408  
E-mail: [info@andhraelec.com](mailto:info@andhraelec.com) ♣ [www.andhraelec.com](http://www.andhraelec.com)





# ANDHRA ELECTRONICS LIMITED

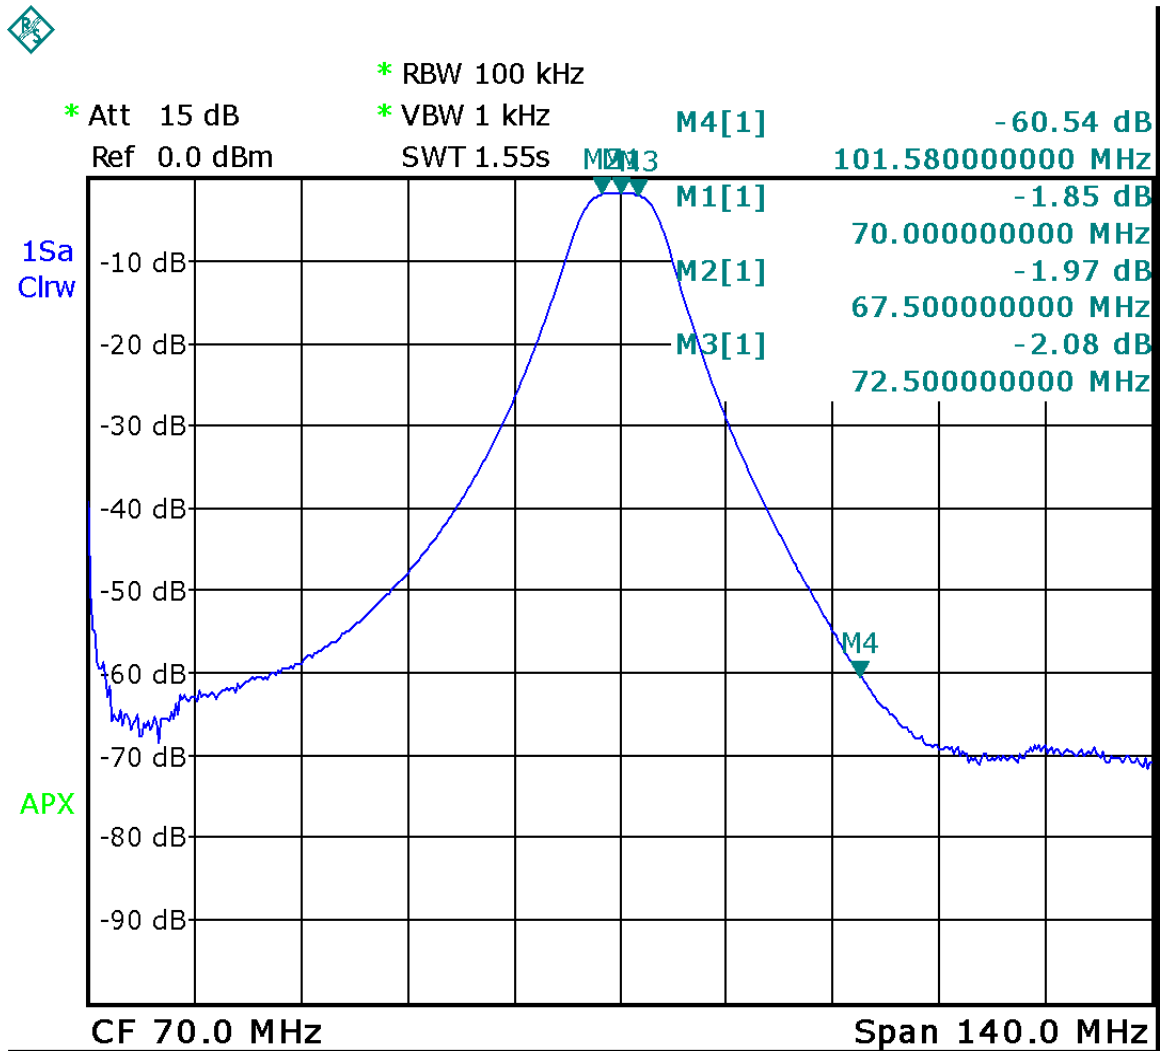

Date: 28.AUG.2010 10:22:28

Plot Nos.34 & 35, Industrial Development Area, KAKINADA - 533 005, INDIA.  
Phone: 91-884-2342203 / 2341850 / 2379407 ♣ Fax: 91-884-2341145 / 2379408  
E-mail: [info@andhraelec.com](mailto:info@andhraelec.com) ♣ [www.andhraelec.com](http://www.andhraelec.com)

ISO 9001  
BUREAU VERITAS  
Certification

