




ANDHRA ELECTRONICS LIMITED

BAND PASS FILTER

PART NO: AE.BPF 410

SPECIFICATIONS OF BAND PASS FILTER

1. PASS BAND	:	404 – 416MHz
2. INSERTION LOSS	:	3.5 dB (MAX)
3. PASS BAND VSWR	:	1.6: 1 (MAX)
4. REJECTION	:	70 dB @ 70 MHz, 32 dB @ 340 MHz, 12dB @ 385 MHz, 10dB @ 435 MHz & 60 dB FROM 470-1000 MHz
5. IMPEDANCE	:	50 Ω
6. OTR	:	-20°C TO +75°C
7. PACKAGE	:	ENCLOSED
8. MECHANICAL DIMENSION	:	30.00×10.00×7.00 mm

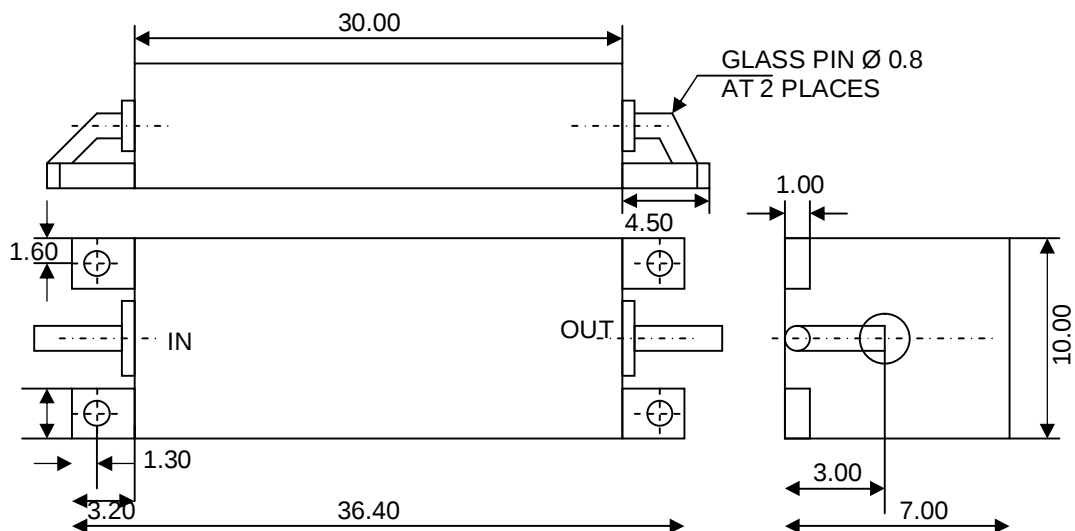

All Dimensions are in mm

Plot Nos.34 & 35, Industrial Development Area, KAKINADA - 533 005, INDIA.


Phone: 91-884-2342203 / 2341850 / 2379407 ♣ Fax: 91-884-2341145 / 2379408

E-mail: info@andhraelec.com ♣ www.andhraelec.com





ANDHRA ELECTRONICS LIMITED

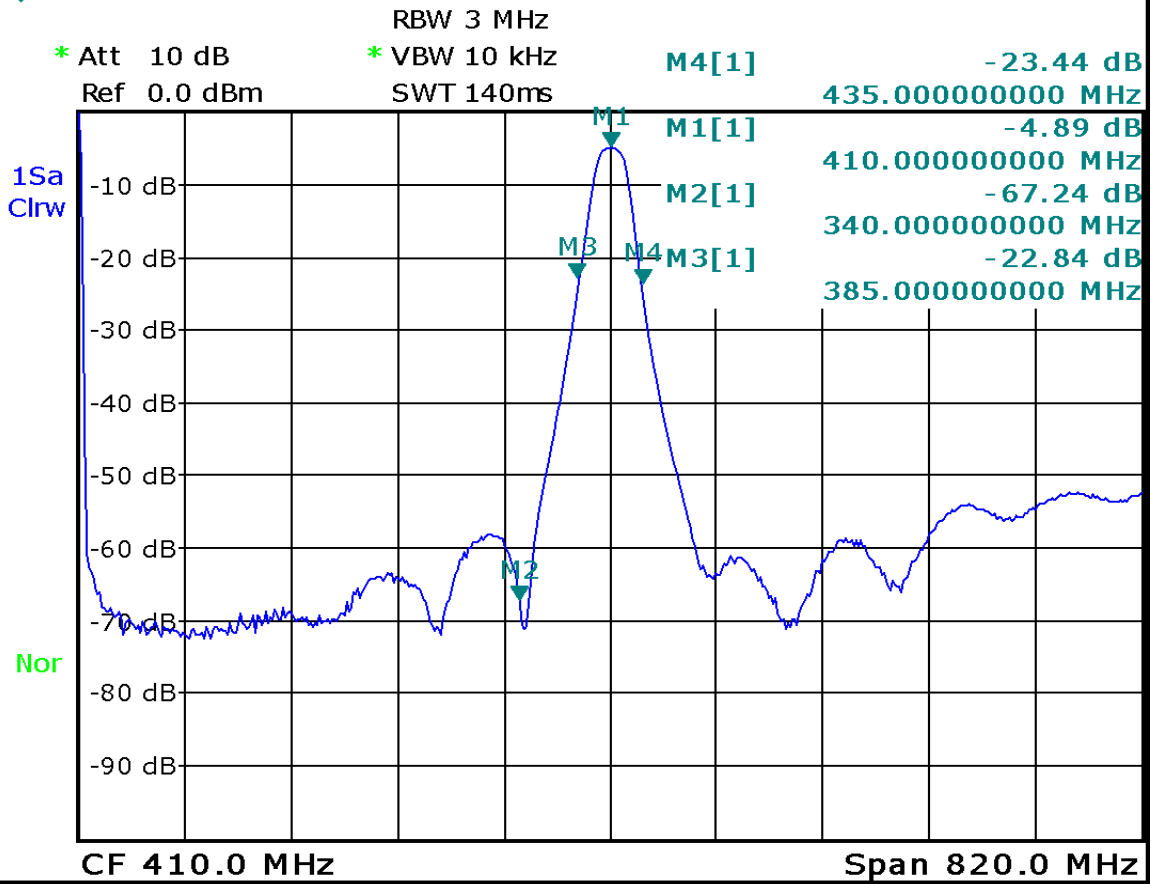

Date: 8.JUN.2010 10:02:01

Plot Nos.34 & 35, Industrial Development Area, KAKINADA - 533 005, INDIA.
Phone: 91-884-2342203 / 2341850 / 2379407 ♣ Fax: 91-884-2341145 / 2379408
E-mail: info@andhraelec.com ♣ www.andhraelec.com

ISO 9001
BUREAU VERITAS
Certification

