




# ANDHRA ELECTRONICS LIMITED

## LOW PASS FILTER

PART NO: AE.LPF  
FREQ: DC-1000 MHz

### SPECIFICATIONS OF LOW PASS FILTER

1. PASS BAND	:	DC – 1000 MHz
2. INSERTION LOSS	:	2.0 dB (MAX)
3. PASS BAND VSWR	:	1.6: 1 (MAX)
4. REJECTION	:	36 dB @ 1250 MHz > 40 dB UP TO 2500 MHz
5. IMPEDANCE	:	50 Ω
6. OTR	:	-20°C TO +75°C
7. PACKAGE	:	CONNECTOR VERSION
8. MECHANICAL DIMENSION	:	35.00×16.00×16.00 mm

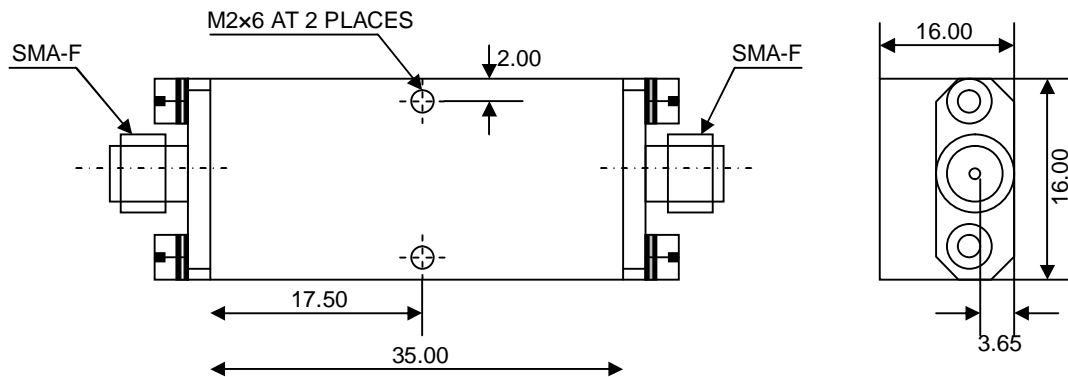

All Dimensions are in mm



# ANDHRA ELECTRONICS LIMITED

---

Plot Nos.34 & 35, Industrial Development Area, KAKINADA - 533 005, INDIA.  
Phone: 91-884-2342203 / 2341850 / 2379407 ♣ Fax: 91-884-2341145 / 2379408  
E-mail: [info@andhraelec.com](mailto:info@andhraelec.com) ♣ [www.andhraelec.com](http://www.andhraelec.com)

ISO 9001

**BUREAU VERITAS**  
Certification

